




**The Original Since 1981**

11750 Roscoe Blvd. Unit 1 Sun Valley, CA 91352  
 Email: [info@falconstainless.com](mailto:info@falconstainless.com)  
[www.falconstainless.com](http://www.falconstainless.com)

TEL: (818) 767-3569  
 FAX: (818) 768-8533  
 Toll Free 1-800-814-8444

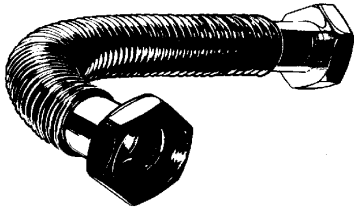

**Corrugated Stainless Steel Flexible  
 Water Heater/ Softener Connectors  
 Specification Sheet**

**SPECIFICATION:**

Furnish and install Corrugated Stainless Steel  
 Push-to-Connect Water Heater/Softener Connector

**COMPLIANCES/LISTINGS:**

- \* ICC-ES PMG
- \* ICC Listed, Tested & Certified
- \* UPC, IPC, IMC, IRC (USA)
- \* Low Lead Compliant California H & S Code 116875
- \* ASME A112.18.6/CSA B125.6-2009 Compliant
- \* NSF-61 (ICC-ES PMG Certified to ANSI/NSF section 9)
- \* State of Wisconsin, Commonwealth of Massachusetts

**DESIGN FEATURES: Mega-flow SUPER Water-flex™**

- 304 Series Stainless Steel
- Push-to-Connect John Guest Fitting
- Installs onto pipe of copper/CPVC/PEX
- Maintains optimum flow – no restriction
- Kink and Crimp Free
- Chrome plated brass nut
- Extremely Flexible
- Will not corrode or rust
- No Dielectric union required
- Highest Quality EPDM washer
- Resists work hardening
- Burst pressure approx 1850 psi
- 100% Leak Tested
- Working pressure 200 psi
- No Sweat Installation
- Lifetime Warrantee
- Temperature rating 40 – 250 degrees F
- Bright annealed

<u>Model #</u>	<u>Description</u>	<u>Length</u>
PTC34JG-18	3/4" PTC x 3/4" FIP	18"
PTC34JG-24	3/4" PTC x 3/4" FIP	24"
PTCJG= Push to Connect John Guest fitting		



Product Submittal

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_

Model# \_\_\_\_\_ Quantity: \_\_\_\_\_

\_\_\_\_\_  
 Architect/Contractor: \_\_\_\_\_

