

# Falcon Stainless, Inc.

**The Original Since 1981**


43153 Business Park Dr. Temecula, CA 92590

Email: [info@falconstainless.com](mailto:info@falconstainless.com)  
[www.falconstainless.com](http://www.falconstainless.com)

TEL: (818) 767-3569

FAX: (818) 768-8533

Toll Free 1-800-814-8444

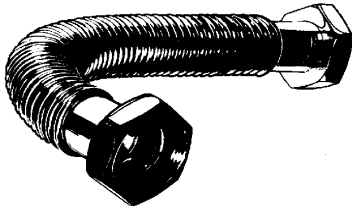

Corrugated Stainless Steel Flexible  
 Water Heater/ Softener Connectors  
 Featuring John Guest® Push-to-Connect  
 Technology

## SPECIFICATION:

Furnish and install Corrugated Stainless Steel  
 Push-to-Connect Water Heater/Softener Connector

## DESIGN FEATURES: Mega-flow SUPER Water-flex™

- 304 Series Stainless Steel
- **Push-to-Connect** John Guest® Fitting
- **Installs onto** pipe **Copper/CPVC/PEX**
- Maintains optimum flow – no restriction
- Kink and Crimp Free
- Chrome plated brass nut
- Extremely Flexible
- Will not corrode or rust
- No Dielectric union required
- High Temp EPDM Washer  
Chlorine and Chloramine Resistant
- Resists work hardening
- Burst pressure approx 1850 psi
- 100% Leak Tested
- Working pressure 200 psi
- No Sweat Installation
- Lifetime Warrantee
- Temperature rating -40 to 220 degrees F
- Bright annealed

## COMPLIANCES/LISTINGS:

- \* ICC-ES PMG
- \* ICC Listed, Tested & Certified
- \* UPC, IPC, IMC, IRC (USA)
- \* Low Lead Compliant California H & S Code 116875
- \* ASME A112.18.6/CSA B125.6-2009 Compliant
- \* NSF-61 (ICC-ES PMG Certified to ANSI/NSF section 9)

Model #	Description	Length
PTC34JG	3/4" PTC x 3/4" FIP	18" & 24"
PTC-PTC34JG	3/4" PTC x 3/4" PTC	18"
PTC34JG-114N	3/4" PTC x 1 1/4" Nylon FIP	18"
PTC34JG-1N	3/4" PTC x 1" Nylon FIP	18"
PTC1JG-1N	1" PTC x 1" Nylon FIP	18"
PTC1JG-114N	1" PTC x 1 1/4" Nylon FIP	18"



<u>Product Submittal</u>	
Job Name:	_____
Date:	_____
Model#	Quantity: _____
_____	
Architect/Contractor: _____	

